


.100"x.100" (2.54mmx2.54mm) PITCHED STRIP SOCKET DUAL ROW IDC TYPE USING SINGLE-LEAF FEMALE CONTACTS

(RoHS Certified)



Item Number:

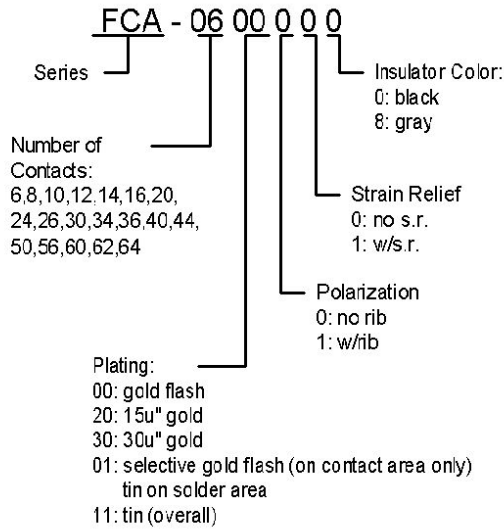

SPECIFICATIONS

CONTACT MATERIAL: Phosphor bronze
 CONTACT PLATING: gold or tin over nickel plating
 INSULATOR MATERIAL: PBT (UL94V-0) + 30% glass fiber

CONTACT RESISTANCE: 15m-Ohm (max)
 INSULATION RESISTANCE: 1000M-Ohm (min)
 DIELECTRIC VOLTAGE RATING: 500V AC mrs (for 60 seconds)
 CURRENT RATING: 1Amp DC
 OPERATING TEMPERATURE: -40C to +105C

*Terminated with .050"(1.27mm) pitched flat ribbon

IDSXXSBIAl	DIMENSIONS					
	A	B	C	D	E	F
06	5.08	6.35	12.32	12.12	13.55	5.00
08	7.62	8.89	14.86	14.66	13.55	5.00
10	10.16	11.43	17.40	17.20	13.55	5.00
12	12.70	13.97	19.94	19.74	13.55	5.00
14	15.24	16.51	22.48	22.28	13.55	5.00
16	17.78	19.05	25.02	24.82	13.55	5.00
18	20.32	21.59	27.56	27.36	13.55	5.00
20	22.86	24.13	30.10	29.90	13.55	5.00
24	27.94	29.21	35.18	34.98	13.55	5.00
26	30.48	31.75	37.72	37.52	13.55	5.00
30	35.56	36.83	42.80	42.80	13.45	4.85
34	40.64	41.91	47.88	47.68	13.55	5.00
36	43.18	44.45	50.42	50.22	13.55	5.00
40	48.26	49.53	55.50	55.30	13.55	5.00
44	53.34	54.61	60.58	60.38	13.55	5.00
50	60.96	62.23	68.20	68.40	13.45	4.85
60	73.66	74.93	80.90	80.70	13.55	5.00
64	78.74	80.01	85.98	85.78	13.55	5.00

